


**Ideal**  
for above ground  
pools



**75%**  
Energy saving  
up to 75%



**Environmentally**  
friendly  
refrigerants



**Convenient**  
plug and play



**Portable**  
compact design

Model: NE-F	30SPR4-CP	50SPR4-CP
Performance Condition: Ambient Temperature: (DB/WB) 27°C/24.3°C; Water Inlet/Outlet Temperature: 26°C/28°C.		
Heating Capacity (kW)	3	5
Consumed Power (kW)	0.57	0.806
COP	5.26	6.2
Performance Condition: Ambient Temperature: (DB/WB) 15°C/12°C; Water Inlet Temperature: 26°C.		
Heating Capacity (kW)	2.2	3.68
Consumed Power (kW)	0.53	0.78
COP	4.15	4.7
Max. Power Input (kW)	0.9	1.5
Max. Current (A)	4.1	7.1
Advised Pool Volume (m <sup>3</sup> )	5-12	10-20
Power Supply	220-240V~/50Hz	
Running Ambient Temperature Range (°C)	-5~43	
Heating Temperature Range (°C)	15~40	
Refrigerant	R32	
Water Pipe Connection (mm)	φ32 or φ38	
Sound Pressure 1m dB (A)	44	48
Water Flow Volume (m <sup>3</sup> /h)	1.5	2.5
Water Pressure Drop (kPa)	10	12
Water Proof Level	IPX4	
Net Dimensions(L*W*H) (mm)	425×290×431	505×360×545

Notice:  
The above data is for reference only. The specific data is subject to actual product.

# Seastar Series

## Mini Pool Heat Pump




**GUANGDONG NEW ENERGY TECHNOLOGY DEVELOPMENT CO., LTD.**

NO.125, Chuangyou Road, Xintang Town, Zengcheng, Guangzhou, Guangdong, P.R.China

+86-20-86735355   info@newenergy-e.com   www.newntide.com

Official Website

## Applications

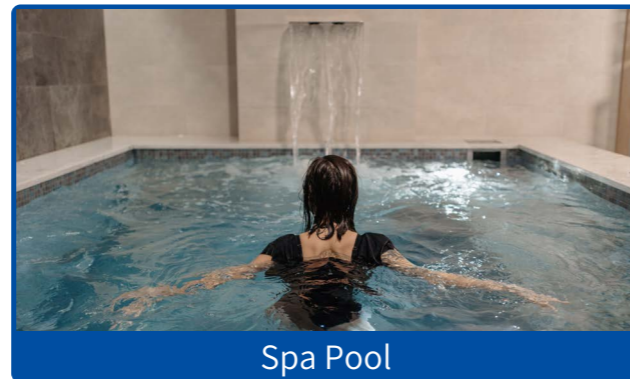

## Easy Installation Plug and Play



Connect the hose



Plug it in



Press ON & Select heating

## Compact and Portable Design

The compact and portable design allows you to enjoy swimming anytime, anywhere.



## Up to 40°C

Maximum heating temperature up to 40°C, it can be used for small swimming pools and spa pools.

